



NETWORK SMARTER,

CONNECT FASTER

Networking product catalogue / 2025

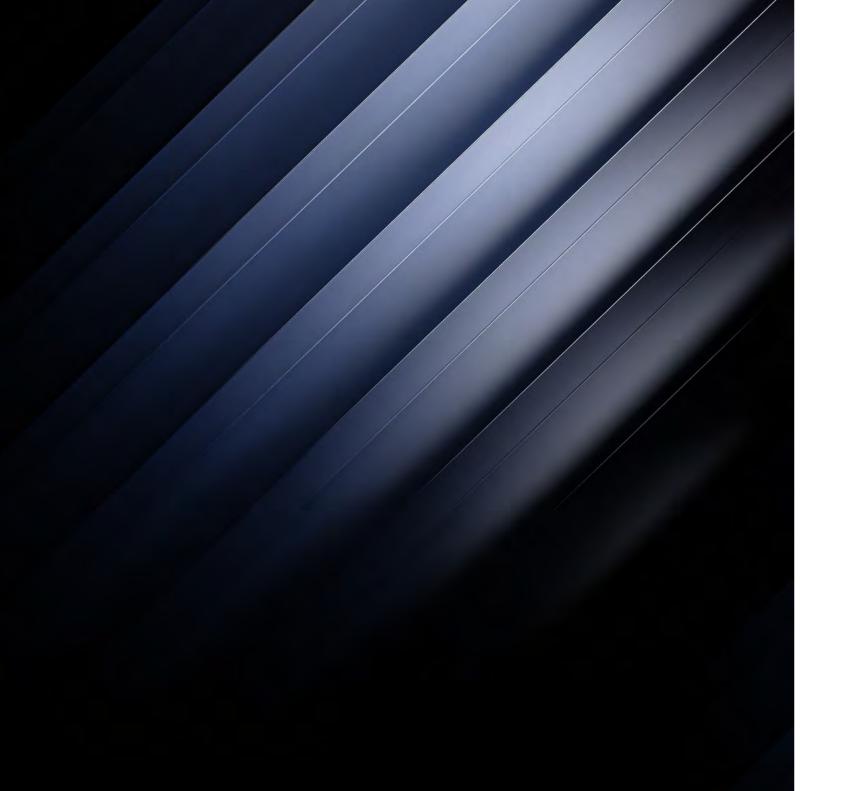


TABLE OF CONTENTS

Company

Who we are	4
What we offer	5
Holistic approach	6

Systems

RutOS	8
TswOS	10
RMS	12

Routers

RUT1 Series	14
RUT2 Series	16
RUT206	18
RUT3 Series	20
RUT9 Series	22
RUTM Series	24
RUTX Series	26
RedCap Series	28
5G Series	30
RUTM3 Series	32
RUTC50	34
RUTM52	35
RUTM56	37
OTD Series	38

Gateways

TRB1 Series	40
TRB2 Series	42
NTP001	44
TRB500	45

Ethernet switches

TSW0 Series	46
TSW1 Series	48
TSW2 Series (Unmanaged)	50
TSW2 Series (Managed)	52
TSW304	54
TSF010	55

Modems

TRM2 Series	56
TRM500	57

Access points

TAP Series	58
DAP Series	60

Accessories

Outdoor antennas	62
Powering options	64
Antenna options	66
Mounting options	67
Other	68

Device comparison

Routers	69
Gateways	72
Modems, access points	73
Ethernet switches	74

WHO ARE WE?

Teltonika creates IoT connectivity equipment for the IoT world of tomorrow. With over 25 years of market expertise, we bring our vision and expertise to create products of seamless connectivity, simple integration, and remote management capabilities for industrial solutions worldwide.



Mission

Our exceptional skills in being a fast and flexible partner reflect our needs to be closer to our clients in every world region. Long-standing experience, reliable supply chain, highest technology process models stand for our ability to produce millions of IoT devices to our clients.

Vision

We aspire to become one of the global leaders of providing unique IoT solutions that contribute to making people's lives easier. We are open-minded to conclude the environment to the creative, ambitious work professional in Lithuania and the rest of the world to grow and contribute towards our Mission.

Values


We not only work but also live to help and share kindness to the people, especially to those who need our help the most. We are keeping our values by continuously and courageously creating synergy between Teltonika and business partners, as well as clients.

WHAT WE OFFER?

Our industrial routers, gateways, Ethernet switches, access points, modems, and remote management system are made with engineer

needs, mindset, and workflow in mind. These reliable networking equipment are made to last, perform, and bring your IoT vision to life.

GROWING PORTFOLIO

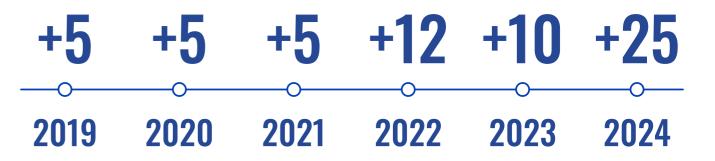

Reliable

Industrial-grade networking devices designed for durability and uninterrupted connectivity in the most rigorous environments.

Secure

Maximum security ensured by regular safety audits, firmware updates, and vulnerability management by our dedicated cybersecurity team.

Easy to use

High in simplicity and functionality, our products are engineered for professional applications without requiring any special training.

HOLISTIC APPROACH

From concept to finished product, our networking products are designed, developed, and manufactured in-house in our manufacturing

facility in Lithuania, guaranteeing the highest European quality with maximum flexibility.



8 cutting-edge SMT lines

100+ automation robots

Millions of products produced yearly

Expertise

Over 25 years of market expertise in reliably enabling industrial IoT and M2M solutions worldwide.

Flexibility

Highly customisable products that adapt to your solution's needs.

Assurance

Full and precise quality assurance in every step of production thanks to in-house design, development, and manufacturing.



RUTOS

OpenWRT-based Linux OS designed for engineer ease of use, customisability, and efficient workflow



Reliable

Enhanced uninterrupted connectivity and protocol support for your IoT needs

Secure

Full of security features and failsafes to ensure maximum device and network security

Easy to use

Streamlined and customisable UX for simple yet comprehensive management

Mobile

Mobile modes	Bridge, Passthrough, NAT
Mobile features	Auto SIM switching, SMS & call control, SMS relays, SIM idle protection, framed routing
Mobile communication control	Operator black/white list (by country or separate operators), band lock, auto APN, multiple PDNs, USSD

Wireless

Wireless modes	Access point (AP), station (STA), wireless mesh (802.11s), fast roaming (802.11r), Relayd, BSS transition management (802.11v), radio resource measurement (802.11k)
Wireless security	WPA2-Enterprise - PEAP, WPA2-PSK, WPA-EAP, WPA-PSK, WPA3-SAE, WPA3-EAP, OWE; AES-CCMP, TKIP, auto-cipher modes, client separation, EAP-TLS with PKCS#12 certificates, disable auto-reconnect

Network

Connection monitoring	Ping reboot, Wget reboot, periodic reboot, LCP and ICMP for link inspection
Networking	VoIP passthrough support, connection monitoring, firewall, firewall status page, ports management, network topology, DHCP, QoS / Smart Queue Management (SQM), DDNS, Network backup, load balancing, hotspot, SSHFS, VRF support
Routing	Static routing, dynamic routing (BGP, OSPF v2, RIP v1/v2, EIGRP, NHRP), policy-based routing

Security

Security basics	Preconfigured and customisable firewall, web filtering, DMZ, user control, firewall status
VPN and tunneling	OpenVPN, IPsec, GRE, PPTP, L2TP, Stunnel, DMVPN, SSTP, ZeroTier, WireGuard, Tinc, Tailscale
Authentication	Pre-shared key, digital certificates, X.509 certificates, TACACS+, Radius, IP & login attempts block, time-based login blocking, built-in random password generator

Services

Time sync services	NTP (server, client), GNSS, Mobile operator
Other services	Data to server, I/O control, location services, WoL, network topology
Industrial protocols	MODBUS (supported connection types RTU (RS232, RS485), TCP, USB), BACnet, DNP3, M-Bus, OPC UA, DLMS
Communication & monitoring	JSON-RPC, MQTT (broker, publisher, subscriber, Azure MQTT, Kinesis), SNMP, SSH, TR-069, WEB UI, CLI
Serial modes	Console, serial and M-Bus over IP, modem, Modbus gateway, NTRIP
USB services	Samba share, USB-to-serial, storage memory expansion, printer server, DLNA
3rd party cloud support	Azure IoT Hub, AWS IoT Greengrass, Cloud of Things, Cumulocity, ThingWorx

Customisation

RutOS developed on	Open-WRT based Linux OS
Supported languages	Busybox shell, Lua, C, C++, Python, Java
Development tools	Software development kit with a build environment
OS languages	English, German, Spanish, Portuguese, Japanese, Turkish

TSWOS

OpenWRT-based Linux
OS designed for easy and
comprehensive managed switch
workflow



Seamless

Numerous DHCP options for enhanced network stability and control

Secure

Comprehensive authentication features for enhanced security and access control

Reliable

Remote port management, ensuring uninterrupted network performance

Services

Supported protocols	EtherNet/IP, Profinet (class B), SNMP V2, V3, LLDP, and more
Network management	802.1p CoS, 802.1x port-based network access control, 802.1Q VLAN

Network

MRP	MRP client/server								
L2 features	Loop protection, forwarding table, VLAN, STP/RSTP								
L3 features	Static IPv4 routing, static IPv6 routing, DHCPv6 client, static IPv6 address								
DHCP	DHCP client/server, static leases, and MAC with wildcards								
Port settings	Enable/disable, link speed control, port isolation, PoE management, EEE (802.3az) management, port mirroring								

Security

Authentication	PAM, Radius & TACACS+, IP & login attempts block
Authentication	PAM, Radius & TACACS+, IP & login attempts block

QoS

QoS	Port priority, DSCP priority, 802.1p priority, ToS
Scheduling	SP/WFQ/WRR
Bandwidth control	Rate limiting, storm control
Traffic shaper	Port-based shaping

Diagnostics

Tools	Cable diagnostic, ping, traceroute, nslookup
Ping reboot	Port-specific PoE reboot



User-friendly platform for remotely accessing and controlling your fleet of devices, tailor-made to meet your remote IoT solution needs

Access

Easy remote access to your devices – no public IP needed

Unite

Unified platform with multitenancy capabilities

Customise

Adaptable interface and functionality to best fit your needs

Integrate

API support for integrating RMS into your solution

Management

Gain complete and secure control over your fleet of Teltonika networking devices—no public IP needed

Connect

Secure your entire remote infrastructure quickly and easily with robust VPN connections

VPN

Reach and remotely control your end devices connected to RMS-compatible devices

Security

Developed in-house, RMS ensures secure communication and data integrity by adhering to the strictest privacy and cybersecurity standards set by the European Union

Hosting

Hosted on AWS: a leading cloud server synonymous with security, scalability, and high availability

Applications

RMS VPN for direct VPN access and automatic client syncing

Mobile app for iOS and Android

Teltonika ID for two-factor authentication

Pricing

Long-term or flexible licensing options for modular and cost-effective pricing

Customisation

Adapt RMS to your solutions using custom control functions, alerts, and automation schemes

Capabilities

Full management capabilities of supported Teltonika networking devices, including remote onboarding, custom alarms, firmware updates, automatic backups, performance analysis, and more

Secure and direct access to third-party devices via RMS Connect or VPN

Availability

RMS is free to start: creating an RMS account, adding Teltonika networking devices, and testing its capabilities can all be done free of charge

 $\mathbf{2}$



NAT functionality

Perfect for network segmentation

Connectivity

2 × 10/100 Mbps Ethernet ports, Wi-Fi 4

Power input

1 × 3-pin tailored for industrial use

Quick & easy

Simple installation with an Integrated DIN rail bracket

RUT140

Compact, easy, and affordable



Compact & tailor-made for RS232 communication

IDEAL FOR

Network segmentation

Acting as boundary devices for isolated networks within an existing infrastructure, ensuring both network security and controlled external access

Production line connectivity

Easy connection of each production line to a separate network, enhancing security, optimising traffic, and ensuring smooth data flow

Legacy equipment connectivity

Easy connection of legacy equipment, including CNC machines, PLCs, medical equipment, and more



3-PIN CONNECTOR INCLUDED



Single-SIM LTE

4G LTE, backward compatible with 3G

WAN failover

Automatically switches to an available backup connection

Interfaces

2 × 10/100 Mbps Ethernet ports, digital I/Os

Wi-Fi

2.4 GHz (b/g/n), wireless AP with hotspot

RUT200

Affordable Cat 4 all-star for select regions



Industrial Performer with Seamless eSIM™ Connectivity



IDEAL FOR

POS systems

Seamless connectivity in retail, restaurants, hotels, or any mobile businesses

Digital service hubs

Reliable connectivity for digital signage displays and interactive selfservice terminals, such as parcel or vending machines

Mobile and temporary deployments

Ideal for construction sites, events, or emergencies requiring quick and reliable connectivity





Compact & versatile

IDEAL FOR

Industrial automation

Easy connection to industrial equipment, including PLCs, sensors, and more

Smart traffic control

Active & passive PoE for simplified installation with reduced cabling

Renewable energy & utilities

Support of key interfaces and protocols for seamless equipment connection



FEATURES

LTE Cat 4

4G, backward compatible with 3G/2G

Interfaces

Ethernet, RS232 & RS485

Power input

1 × 2-pin tailored for industrial use

PoE

Active & passive

ENDLESS USE CASES





VPN support

GRE, PPTP, L2TP, Stunnel, DMVPN, SSTP, ZeroTier, Tinc & more

RMS

Compatible with our Remote Management System

Configurable I/Os

2 x configurable digital I/Os

Durable

Rugged aluminium housing withstanding -40 °C to 75 °C

RUT301

Ethernet connectivity with versatile interfaces



361° of LTE Cat 6 & Wi-Fi connectivity

IDEAL FOR

Sustainable energy

Easy monitoring of wind turbines, solar panels, and other infrastructure in remote, rural, or offshore locations

Smart city applications

Reliable connectivity for CCTV cameras, traffic management systems, billboards, digital signage, retail applications, and more

Smart agriculture

Seamless connectivity for remote farm management, from monitoring crops and livestock to automated feeding and controlling climate systems



EXPERT REMOTE MANAGEMENT



Comprehensive cellular & Ethernet capabilities



Dual-SIM

With auto-failover and backup WAN

LTE Cat 4

4G, backward compatible with 3G/2G

Ethernet

4 × 10/100 Mbps Ethernet ports

Wi-Fi

2.4 GHz (b/g/n), wireless AP with hotspot

RUT901

All-reliable cellular router for select regions



Master of interfaces for select regions, including RS232 and RS485



All-reliable cellular router with PoE+



Master of interfaces available globally, including RS232 and RS485

IDEAL FOR


Industrial applications

Designed for reliable performance in industrial environments, including wide protocols support and DIN rail mounting


Remote monitoring & management

Seamless connectivity for remote applications, including pop-up stores, precision machinery, remote mining operations, and mobile agricultural equipment

VERSATILE INTERFACES, UNLIMITED POTENTIAL



*RUT901 & RUT951



*RUT906 & RUT956



Gigabit Ethernet

4 x ports with up to 128 supported port/tag-based VLANs

Interfaces

Including digital I/Os & USB

VPN

Including OpenVPN, IPsec, PPTP, L2TP & DMVPN

RMS

Compatible with our Remote Management System

RUTM08 RUTM10

Ethernet connectivity with 4x Gigabit Ethernet



Wired-only Cat 6 connectivity



Ethernet connectivity with Dual-Band Wi-Fi



Cat 6 with Dual-Band Wi-Fi

IDEAL FOR

Urban development

Secure and stable connectivity for surveillance systems, traffic monitoring, elevator systems, and other urban spaces and applications

Enterprise

Reliable Internet access combined with VPN support, traffic management, and other advanced features ensuring smooth operation and security



YOUR MULTITOOL FOR NETWORKING **MASTERY**



Connectivity

4G cellular, Ethernet & wireless routers

Interfaces

Including Gigabit Ethernet, digital I/Os & USB

RMS

Compatible with our Remote Management System

RutOS

Feature-rich operating system with advanced security features

RUTX08

Ethernet connectivity with 4x Gigabit Ethernet



Wired-only Cat 6 connectivity



Ethernet connectivity with Bluetooth and Dual-Band Wi-Fi



Cat 6 with Bluetooth and Dual-Band Wi-Fi

RUTX12

Dual Cat 6 modems with simultaneous connections



Cat 12 with up to 600 Mbps



Rack-mountable Cat 6 with SFP port & dual power supply

IDEAL FOR

Retail

Seamless connectivity for POS systems, interactive kiosks, self-service and parcel terminals, vending machines, and more

Public transportation

Reliable wireless connectivity for personnel, passengers, and on-board devices such as GPS trackers, ticketing terminals, and more

DUAL MODULES, SINGULAR BRILLIANCE





RedCap 5G

Low latency, high capacity, affordable pricing

Future-proofing

Backward compatible with 4G LTE Cat 4

Wi-Fi

Wireless access point with hotspot functionality

WAN failover

Automatic switching to available backup connection



Compact & affordable 5G RedCap



IDEAL FOR

Private networks


Balancing costs, performance, and efficiency while retaining the advantages of 5G technology

Industrial IoT applications

Enabling low-latency connections for industrial machines, sensors, and devices needing reliable communication with minimal data throughput.

Smart city

Optimised surveillance cameras, street lighting, parking sensors, traffic management systems, and other smart city applications.



ENTER A
REDCAP 5G
WORLD



5G

Ultra-high cellular speeds over 3 Gbps

Dual-SIM

Auto-failover, backup WAN, and other switching scenarios SA & NSA

Supports both 5G architectures

Future-proofing

Backward compatible with 4G (LTE Cat 12, 19, 20) and 3G

RUTX50

5G powerhouse for worldwide industrial applications



5G powerhouse for the North American and Japanese markets



MVP of 5G affordability



5G router with a US-made Telit modem



5G router for seamless serial integration



Always-on 5G connectivity

IDEAL FOR

Mobile & temporary deployments

Pop-up stores, event venues, outdoor festivals, construction sites, and other locations requiring reliable and quick-to-deploy connectivity

Industrial applications

Future proof manufacturing plants with ultra-high 5G cellular speeds, redundancy with dual SIM & eSIM, and RS232/RS485 serial interfaces, ensuring seamless integration of legacy equipment



HARNESS THE POWER OF 5G NETWORKS





COMPACT 5G ROUTERS

RUTM3 SERIES

5G Connectivity in a Compact Form

COMMON FEATURES

Connectivity

5G, 4G, 3G

Dual-SIM

With auto failover, backup WAN, and other switching scenarios

eSIM™*

Seamless connectivity with eSIM™ SGP.22

SA & NSA

Supports both architectures to leverage the 5G infrastructure

RUTM30

Your compact 5G router with eSIM™



Your cost-efficient 5G router

IDEAL FOR

Industrial IoT

enabling low-latency connections for industrial machines, sensors, and devices needing reliable communication.

Digital service hubs

Connectivity for digital signage displays and interactive self-service terminals, such as parcel or vending machines.

Intelligent transportation systems

Reliable connectivity for smart traffic lights, surveillance systems, traffic monitoring and management.



SMALLEST 5G ROUTER IN OUR PORTFOLIO

33

*Depends on the order code.



Your 5G wireless multitool

IDEAL FOR

Public transportation

Reliable wireless connectivity for personnel, passengers, and on-board devices such as GPS trackers, ticketing terminals, and more

Pop-up events

Reliable connectivity in pop-up events and uninterrupted event streaming capabilities

Smart city applications

Reliable connectivity for CCTV cameras, traffic management systems, billboards, digital signage, retail applications, and more



FEATURES

5G

Ultra-high cellular speeds of up to 3.4 Gbps

Wi-Fi 6

Dual-band multi-user MIMO wireless capabilities

Enhanced processing

1GB RAM and 8GB flash for edge computing applications **Dual-SIM** & eSIM™

With auto-failover, backup WAN, and other switching scenarios

RUTM52

Dual 5G for ultra-high speeds

IDEAL FOR

First responders

Dual 5G connectivity ensures reliable, realtime communication and seamless operation of critical devices like body cameras, GPS systems, and medical equipment

Live streaming

Provides reliable, high-speed, and low latency 5G connectivity for uninterrupted broadcasts and stable performance in demanding network conditions





FEATURES

Dual 5G modems

Double the cellular speeds and always-on connection **Dual-SIM** & eSIM™

With auto failover, backup WAN and other switching scenarios

SA & NSA

Supports both 5G architectures

Future-proofing

Backward compatible with 4G (Cat 20)

RATHER WATCH?

Explore our YouTube channel



FAST.

RELIABLE. RUTM52.



Dual modem router

IDEAL FOR

First responders

Provides resilient communication for mobile command centres and vehicles. Its 5G high-bandwidth capabilities, with essential fallback to 4G, 3G, and 2G, ensure continuous coordination and critical data access even in compromised or challenging conditions

Remote areas

Ensures essential connectivity for safety and operational efficiency in challenging remote environments. Provides stable and reliable network support for modern systems, leveraging critical 2G coverage for isolated areas where 4G/5G networks may be limited





FEATURES

Dual modem

1 × 5G & 1 × 4G Cat 4 modems

SIM & eSIM™

With auto failover, backup WAN and other switching scenarios

Legacy network support

Backward compatible with 3G & 2G networks

Plug-n-play

Ready to be used out of the box

OUTDOOR ROUTERS OTD SERIES Go outdoors & brave the elements 38

COMMON FEATURES

Outdoor router

IP55 durability for outdoor deployment

Dual-SIM

Auto failover and other switching scenarios

PoE

Streamlined powering options

Easy mounting

Integrated mounting bracket

OTD140

Outdoor 4G router



Outdoor 5G router with eSIM

IDEAL FOR

Construction sites

Reliable connectivity for portable offices, trailers, and CCTV cameras under rainy and dust-exposed environmental conditions

Remote outdoor monitoring

Suitable for all kinds of remote outdoor projects monitoring solar panels, pipelines, offshore installations, and more

Rural & remote areas

Connectivity for farms, cabins, and rural businesses, ensuring seamless Internet access and device integration even in harsh outdoor conditions



CONNECTIVITY THAT BRAVES THE ELEMENTS



Perfect interface

Each device is tailor-made to support a specific interface

4G LTE

LTE Cat 1, Cat 4, and Cat 6 single-SIM cellular gateways

Industrial-grade

Compact, durable, and designed for industrial applications

RMS

Compatible with our Remote Management System

TRB140

Your LTE Cat 4 gateway to connectivity with Gigabit Ethernet



Your compact gateway to connectivity – with I/Os!



RS232 for point-to-point communication

TRB143

M-Bus for seamless telemetry



RS485 for multipoint communication



Your LTE Cat 6 gateway to connectivity with Gigabit Ethernet

IDEAL FOR

Smart metering

Two-way communication between smart meters and central systems for easy, real-time telemetry

Remote monitoring & management

Reliable, 24/7 monitoring and management of equipment, infrastructure, and environmental conditions

YOUR NEEDS, YOUR SOLUTION



TRB140 Ethernet



TRB141 I/O



TRB142 RS232



TRB143 M-Bus



TRB145 RS485



TRB160 USB Type-C



Uninterrupted 4G

Dual-SIM with auto-failover and backup WAN

Interfaces

1 x Ethernet port, configurable I/Os, RS232, RS485

Compact

All you need, right in your pocket

GNSS

Location services and time synchronisation

TRB246

LTE Cat 4, backward compatible with 3G/2G



LTE Cat 1/NB-IoT & 450 MHz support

IDEAL FOR

Real-time telemetry


Reliable connectivity for real-time data collection and transmission to and from remote equipment

Utilities

Expert and secure utilities system management, real-time data gathering from energy meters, and predictive maintenance

Industrial applications

 $\ensuremath{\mathsf{RS232}}$ and $\ensuremath{\mathsf{RS485}}$ for easy connectivity in industrial machinery, such as PLCs, CNC machines, and more



GREATER RANGE, BROADER APPLICATION



Low-cost Stratum-1 NTP server

IDEAL FOR

Time synchronisation

Synchronising accurate, UTC-traceable time in both public and private networks

FEATURES

Network time synchronisation

Accurate & low-cost NTP server

Multiple interfaces

Featuring RJ45, RS232, RS485 & I/Os

Security

Authentication, access control & more

Plug-and-play

Simple installation & configuration at minimum effort



Your gateway to a 5G world

IDEAL FOR

Automation

Maximum throughput at minimum latency for automation solutions demanding precision and highspeed processing

Smart agriculture

Enhancing operational efficiency in agriculture applications and enabling increased scalability of smart machines



FEATURES

5G

5G SA/NSA, backward compatible with LTE Cat 20 & 3G

Throughput

Ultra-high cellular speeds of up to 1 Gbps

Low latency

Single-digit latency for mission-critical applications

Compact

Smallest 5G gateway on the market



Ethernet

5 to 8 10/100 Ethernet ports

2-pin power

Simple and suitable for industrial applications

Easy mounting

Integrated DIN rail bracket for plug-and-play deployment

Industrial design

Anodised aluminium housing and panels

TSW010

Cover your switch basics effortlessly



8 ports, endless possibilities



8 PoE+ ports for power & connectivity

IDEAL FOR

Water & wastewater management

Remote management and control of water treatment plants, pump stations, sewage systems, and more

Factory floor automation

Facilitates automation processes via connectivity for PLCs, sensors, actuators, and other industrial devices

PoE lighting

Centralised control and reconfiguration flexibility for smart lighting systems



AFFORDABLE INDUSTRIAL SWITCHES



Plug-and-play

No additional configuration needed, no time wasted

Easy mounting

Multiple DIN rail mounting options

Ethernet

5 x Gigabit Ethernet

Durable

Rugged aluminium housing withstanding -40 °C to 75 °C



4 PoE+ ports for your powering needs



Tailor-made for automotive solutions



For your 5-port solution needs



5 ports & integrated DIN rail bracket

IDEAL FOR

Smart building management

Connect your smart lighting, HVAC systems, occupancy sensors, and other devices

Mobile/autonomous surveillance systems

Connect your IP cameras, recording devices, and other devices for real-time monitoring and enhanced security

Industrial automation

High-speed connectivity for PLCs, HMI panels, industrial robots, and other automation and manufacturing devices



SWITCH TO AUTOMOTIVE PoE



Plug-and-play

No additional configuration needed, no time wasted

SFP

2 x SFP for long-range fibre-optic communication

Ethernet

8 x Gigabit Ethernet

Easy mounting

Integrated DIN rail bracket

TSW200

8 PoE+ Ethernet & 2 SFP for maximum efficiency



8 Ethernet, 2 SFP, zero hassles

IDEAL FOR

Surveillance power hub

Connect your IP cameras, NVRs, and access control systems in surveillance deployments

Smart agriculture

Connect your soil moisture sensors, weather stations, and irrigation controllers via simple setup and operation

Energy storage systems

Seamless communication between solar panels and energy storage systems



SPEED, DISTANCE, FLEXIBILITY



Managed

L2 managed switches with L3 features

Protocol support

PROFINET, Ethernet/IP, LLDP, MRP, SNMP V2/V3, and more

SFP & Ethernet

8 x Gigabit Ethernet and 2 x SFP

TswOS

Custom OS tailor-made for managed switches



Network control with PoE+ capabilities



For your advanced network control needs

IDEAL FOR

Manufacturing

Upgrade production lines to improve efficiency and reduce downtime

Highway tunnel infrastructure

Pivotal for ensuring continuous operation and safety via MRP support

Traffic control systems

Remote monitoring and management of traffic flow, signals, and surveillance cameras







Tiny switch for big ambitions

IDEAL FOR

Emergency services & public safety

Ensures the resilience and continuity of communication systems during emergencies or power outages

FEATURES

Extra tiny

Only 102 × 25 × 81.5 mm

Powering

Can be powered via DC, AC, or Ethernet

Gigabit Ethernet

4 x Gigabit Ethernet ports

Durable

Shock-resistant aluminium housing



Flat switch with deep functionality

IDEAL FOR

Narrow & tightspace applications

Provides network connectivity for solutions low on space, such as information kiosks, digital signage displays, and ticketing machines



3-pin power

Flexible and tailor-made for industrial use

Flat & compact

Flat and compact design weighing only 142 g

Easy mounting

Integrated DIN rail bracket for plug-and-play deployment 7-57 VDC

Suitable voltage range for industrial applications

INDUSTRIAL CELLULAR MODEMS

TRM2 SERIES

Connectivity - simple as that.



LTE Cat 4 backward compatible with 3G/2G



LTE Cat 1, backward compatible with 3G/2G



LTE Cat M1/NB-IoT, backward compatible with 2G

COMMON FEATURES

Plug-and play

No additional configuration needed, no time wasted

Micro USB

Powered via Micro USB

Industrial-grade

Compact and durable devices with low power consumption

4G

Single-SIM 4G modems

FEATURES

5G

Ultra-high cellular speeds of up to 3.4 Gbps

TRM500

5G connectivity – simple as that.

Future-proofing

Backward compatible with 4G (Cat 19) and 3G

USB Type-C

For simultaneous network data and powering

Compact

Small size, easy installation

PoE-in

Can be powered via PoE

Sleek & easy

UV-stabilised plastic housing and integrated mounting bracket

RMS

Free access to RMS Management for 24 months Wi-Fi

802.11r, 802.11k, and 802.11v fast roaming support



Wi-Fi 4 for enhanced wireless coverage



Wi-Fi 5 for enhanced wireless coverage in small & medium spaces

IDEAL FOR

Public spaces

Extends wireless coverage in larger areas, such as shopping malls, universities, airports, event venues, and more

People-counting solutions

Detection of Wi-Fi-enabled devices for people counting and motion analysis for establishing foot traffic patterns

Enterprise connectivity

Ensures reliable Wi-Fi connectivity in all areas, including meeting rooms, offices, and common areas



EASY ACCESS, EASIER MOUNTING

Wi-Fi ACCESS POINTS

TAP SERIES

Seamless access, simple point



Wireless

Seamless Wi-Fi 4 with Wi-Fi mesh & Fast Roaming

Ethernet

2 × 10/100 RJ45

Power input

1 × 3-pin tailored for industrial use

Easy mounting

Integrated DIN rail bracket for plug-and-play deployment

DAP140

Industrial, compact & affordable



Industrial, compact & affordable—with RS232

IDEAL FOR

Smart factory

Seamless connectivity for automation systems and equipment, boosting efficiency and enabling real-time monitoring

Industrial Wi-Fi mesh

Reliable wireless network with maximum coverage across large industrial spaces

Legacy equipment

Easy connection to legacy equipment, including CNC machines, PLCs, medical equipment, and more $\,$



PERFECT FOR WI-FI MESH NETWORKS



IP67

Water and dust-resistant for ultimate outdoor reliability

Omnidirectional

Designed for reliable signal coverage from every direction

Mounting bracket

Quick and easy pole/mast mounting

Perfect match

Compatible and designed to contain select Teltonika routers



FOR RUTX11 & RUTM11

4G, Wi-Fi, GPS & Bluetooth Order code: PR1IC970



FOR RUT2 SERIES

4G & Wi-Fi Order code: PR1IC860



FOR RUTX50 & RUTM50

5G/4G, Wi-Fi & GPS Order code: PR1ICA70



FOR RUT9
SERIES

4G, Wi-Fi & GPS Order code: PR1ICC60



Ultimate outdoor coverage



ACCESSORIES

A wide selection of industrial-grade accessories to perfect your networking solutions, including antennas, power supply adapters, and mounting solutions designed for optimal compatibility.

Can't find what you're looking for? Let us know and we'll get your fix.

POWERING OPTIONS



2-PIN POWER SUPPLY, 130W EU: PR318EUA / AU: PR313AU3



2-PIN POWER SUPPLY, 250W EU: PR320EUA / AU: PR320AUA US: PR320USA / UK: PR320UKA



2-PIN POWER SUPPLY, 62W EU: PR317EUA / AU: PR317AUA US: PR317USA / UK: PR317UKA



2-PIN POWER SUPPLY, 9W EU: PR3PREU6 / AU: PR3PRAU6 US: PR3PRUS6 / UK: PR3PRUK6



4-PIN TO 4-PIN POWER CABLE Order code: PR2PP10B



4-PIN PLUG WITH CONTACT TERMINALS Order code: PR4MK04K



4-PIN POWER ADAPTER WITH I/O ACCESS Order code: PR5MEC21



4-PIN TO BARREL SOCKET ADAPTER Order code: PR2PD01B



AUTOMOTIVE POWER SUPPLY Order code: PR2AM20M



BAT120 POWER SUPPLY Order code: BAT120000000



POWER CABLE WITH 4-WAY OPEN WIRE Order code: PR2PL15B



POWER CABLE WITH 4-WAY SCREW Order code: PR2FK20M



DIN RAIL POWER SUPPLY, 15W Order code: PR321NP0



DIN RAIL POWER SUPPLY Order code: PR3PDNP0



POWER SUPPLY, 130W EU: PR313EU3 / AU: PR313AU3 US: PR313US3 / UK: PR313UK3



POWER SUPPLY, 18W EU: PR3PXEU3 / AU: PR3PXAU3 US: PR3PXUS3 / UK: PR3PXUK3



POWER SUPPLY, 24W EU: PR3P2EU3 / AU: PR3P2AU3 US: PR3P2US3 / UK: PR3P2UK3



POWER SUPPLY, 62W EU: PR3PWEU3 / AU: PR3PWAU3 US: PR3PWUS3 / UK: PR3PWUK3



POWER SUPPLY, 9W EU: PR3PUEU3 / AU: PR3PUAU3 US: PR3PUUS3 / UK: PR3PUUK3 JP: PR3PUJP3



UNIVERSAL POWER SUPPLY, 9W Order code: PR3PUPS3



UNIVERSAL POWER SUPPLY, 24W Order code: PR315PS3



SINGLE PORT GIGABIT POE INJECTOR EU: PR322EU7 / UK: PR322UK7



EU SINGLE PORT 10/100 MBPS PASSIVE PoE INJECTOR, 19 W Order code: PR323EUB



EU SINGLE PORT GIGABIT PASSIVE POE INJECTOR, 24 W Order code: PR324EUB

ANTENNA OPTIONS



Wi-Fi MAGNETIC SMA ANTENNA Order code: PR1KRF30



5G COMBO MIMO MOBILE/GNSS/Wi-Fi ROOF SMA ANTENNA Order code: PR1KC640



5G MOBILE MAGNETIC SMA ANTENNA Order code: PR1KS536



5G MOBILE SMA ANTENNA Order code: PR1US540



COMBO QUAD MOBILE/GNSS ROOF SMA ANTENNA

Order code: PR1KCL28



COMBO SISO MOBILE/GNSS/Wi-Fi ROOF SMA ANTENNA

Order code: PR1KCS28



MOBILE SMA ANTENNA WITH 450 MHz Order code: PR1US740



SMA CABLE EXTENSION Order code: PR2VM20M



ANGLED COMPACT MOBILE ANTENNA Order code: PR1US450



BLUETOOTH MAGNETIC SMA ANTENNA Order code: PR1KRT25



STRAIGHT COMPACT MOBILE ANTENNA Order code: PR1CS450



GNSS ADHESIVE SMA ANTENNA Order code: PR1KSG30



5G COMBO MIMO MOBILE ROOF SMA ANTENNA Order code: PR1KC647



5G COMBO MIMO MOBILE/GNSS ROOF SMA ANTENNA



Order code: PR1KCI49



MOBILE ADHESIVE SMA ANTENNA Order code: PR1AS420



Wi-Fi DUAL-BAND SMA ANTENNA Order code: PR14RD35



MOBILE MAGNETIC SMA ANTENNA Order code: PR1KS210



MOBILE SMA ANTENNA Order code: PR1US440





SURFACE MOUNTING KIT Order code: PR5MEC12

RAIL HOLDER



COMPACT DIN RAIL KIT Order code: PR5MEC11



DIN RAIL KIT ADAPTER Order code: PR5MEC23



DIN RAIL KIT Order code: PR5MEC00



Wi-Fi DUAL-BAND MAGNETIC SMA ANTENNA Order code: PR1KRD30



Wi-Fi SMA ANTENNA Order code: PR1URF51



COMBO MIMO MOBILE/GNSS/Wi-Fi ROOF SMA ANTENNA Order code: PR1KCO28



COMBO MIMO MOBILE ROOF SMA ANTENNA Order code: PR1KCL25



TSW1-SERIES REAR PANEL WITH DIN Order code: PR5MEC24



RACK MOUNTING KIT Order code: PR5MEC26



SURFACE CLIP HOLDER KIT Order code: PR5MEC22



TSW2-SERIES REAR PANEL WITH DIN RAIL HOLDER Order code: PR5MEC25

OTHER



2x3-PIN CONNECTOR
Order code: PR4RS06K



2x8-PIN CONNECTOR

Order code w/ screws: PR4IO17K

Order code w/o screws: PR4IO16K



CONSOLE CABLE 1.8M Order code: PR2UR18M



ETHERNET CABLE 1.5M Order code: PR2LA15B



USB 2.0 TYPE-A TO MICRO USB TYPE-B CABLE Order code: PR2US08M



CONNECTOR SET
Order code: PR5MEC15



SIM ADAPTER KIT Order code: PR5MEC19



DUST COVERS
Order code for RJ45: PR5MEC32
Order code for SFP: PR5MEC33

DEVICE COMPARISON

PRODUCT KEY Features		RUT140	RUT142	RUT200	RUT206	RUT241 eSIM	RUT260	RUT271	RUT301	RUT361	RUT901	RUT906	RUT951	RUT951 PoE+
5G								Redcap						
4G/LTE				Cat 4	Cat4	Cat 4	Cat 6	Cat4		Cat 6	Cat 4	Cat 4	Cat 4	Cat 4
2G/3G				2G/3G	3G/2G	2G/3G	3G			3G	2G/3G	2G/3G	2G/3G	2G/3G
CPU (MHz)		580	580	580	580	580	580	580	580	580	580	580	580	580
RAM (MB)		128	128	128	128	128	128	128	128	128	128	128	128	128
Flash memory (MB)		16	16	16	32	16	16	16	16	16	16	16	16	16
Active PoE-out														802.3 af/at
Active PoE-in					•									802.3 af/at
Passive PoE-in		•	•	•	•	•	•	•			•	•	•	
Power voltage (VDC)	R S	9-30	9-30	9-30	9-57	9-30	9-30	9-30	9-30	9-30	9-30	9-30	9-30	9-57
SIM card slots	ROUTERS			1	2	1	1	1		1	2	2	2	2
eSIM	8					•								•
Ethernet ports		2	2	2	2	2	2	2	5	2	4	4	4	4
Ethernet speed (Mbps)		100	100	100	100	100	100	100	100	100	100	100	100	100
Wi-Fi standard		n	n	n	n	n	n	n		n	n	n	n	n
GNSS												•		
I/Os				2		2	2	2	4	4	2	7	2	
RS232			•		•							•		
RS485					•							•		
Bluetooth														
USB									Host			Host		
Integrated bracket		•	•											
Grounding terminal		•	•											
RMS support		•	•	•	•	•	•	•	•	•	•	•	•	•
RutOS		•	•	•		•	•	•	•	•		•		•

PRODUCT KEY FEATURES		RUT956	RUT976	RUTMO8	RUTM09	RUTM10	RUTM11	RUTX08	RUTX09	RUTX10	RUTX11	RUTX12	RUTX14	RUTXR1
5G			Redcap											
4G/LTE		Cat 4	Cat4		Cat 6		Cat 6		Cat 6		Cat 6	2xCat 6	Cat 12	Cat 6
2G/3G		2G/3G			3G		3G		3G		3G	3G	3G	3G
CPU (MHz)	-	580	580	2×880	2×880	2×880	2×880	4×717	4×717	4×717	4×717	4×717	4×717	4×717
RAM (MB)		128	128	256	256	256	256	256	256	256	256	256	256	256
Flash memory (MB)		16	32	256	256	256	256	256	256	256	256	256	256	256
Active PoE-out														
Active PoE-in														
Passive PoE-in		•		•	•	•	•	•	•	•	•	•	•	
Power voltage (VDC)	(0	9-30	9-30	9-50	9-50	9-50	9-50	9-50	9-50	9-50	9-50	9-50	9-50	9-50
SIM card slots	OUTERS	2	2		2		2		2		2	2	2	2
eSIM	0 U J													
Ethernet ports	~	4	4	4	4	4	4	4	4	4	4	5	5	5
Ethernet speed (Mbps)		100	100	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000
Wi-Fi standard		n	n			ac	ac			ac	ac	ac	ac	ac
GNSS		•	•		•		•		•		•	•	•	
I/Os		7	7	2	2	2	2	2	2	2	2	2	2	
RS232		•	•											
RS485		•												
Bluetooth										•	•	•	•	
USB		Host	Host	Host										
Integrated bracket														
Grounding terminal				•	•	•	•	•	•	•	•	•	•	•
RMS support		•	•	•	•	•	•	•	•	•	•	•	•	•
RutOS		•		•		•		•		•		•	•	•


PRODUCT KEY FEATURES	RUTM30	RUTM31	RUTM50	RUTM51	RUTM52	RUTM54	RUTM55	RUTM56	RUTM59	RUTX50	RUTC50	OTD140	OTD500
5G	•	•	•		2×5G		•	•	•	•	•		•
4G/LTE	Cat 19	Cat 12	Cat 19	Cat 12	Cat20	Cat19	Cat19	Cat4/ Cat19	Cat19	Cat 20	Cat 19	Cat 4	Cat19
2G/3G	3G	3G		3G	3G	3G		2G/3G		3G	3G	2G/3G	3G
CPU (MHz)	2×880	2×880	2×880	2×880	2×880	2×880	880	2×880	2×880	4×717	2×1300	580	2×880
RAM (MB)	256	256	256	256	256	256	256	256	256	256	1024	128	256
Flash memory (MB)	256	256	256	256	256	256	256	256	256	256	8192	16	256
Active PoE-out												802.3 af/at	802.3 af/at
Active PoE-in												•	•
Passive PoE-in	•	•	•	•	•	•	•	•	•	•	•		
Power voltage (VDC)	9-50	9-50	9-50	9-50	9-50	9-50	9-50	9-50	9-50	9-50	9-50	42.5-57	42.5-57
SIM card slots	2	2	2	2	2	2	2	2	2	2	2	2	2
eSIM	•	•*			•	•	•	•			•		•
Ethernet ports	2	2	5	5	5	5	5	5	5	5	5	2	2
Ethernet speed (Mbps)	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	100	1000
Wi-Fi standard	ac		ac	ax									
GNSS			•		•	•	•	•	•	•	•		
I/Os	2	2	2	2	2	2	4	2	2	2	2		
RS232							•						
RS485							•						
Bluetooth													
USB	Host	Host	Host	Host		Host	Host		Host	Host	Host		
Integrated bracket													
Grounding terminal	•	•	•	•	•	•	•	•	•	•	•		
RMS support	•	•	•	•	•	•	•	•	•	•	•	•	•
RutOS	•	•	•	•	•	•	•	•	•	•	•	•	•

^{*}Depends on the order code.

PRODUCT KEY Features		NTP001	TRB140	TRB141	TRB142	TRB143	TRB145	TRB160	TRB246	TRB256	TRB500
5G											•
4G/LTE			Cat 4	Cat 1	Cat 1	Cat 4	Cat 1	Cat 6	Cat 4	M1/NB	Cat 20
2G/3G			2G/3G	2G/3G	2G/3G	2G/3G	2G/3G	3G	2G/3G	NB2/ EGPRS	3G
CPU (MHz)		580	1200	1200	1200	1300	1200	1200	580	580	1500
RAM (MB)		128	128	128	128	256	128	128	128	128	256
Flash memory (MB)		16	512	512	512	512	512	256	16	16	512
Active PoE-out											
Active PoE-in											
Passive PoE-in			•			•		•			
Power voltage (VDC)		9-30	9-30	9-30	9-30	12-30	9-30	9-30	9-30	9-30	9-30
SIM card slots	٧٧S		1	1	1	1	1	1	2	2	1
eSIM	E W										
Ethernet ports	GATEWAYS	1	1			1		1	1	1	1
Ethernet speed (Mbps)	Ĭ	100	1000			1000		1000	100	100	1000
Wi-Fi standard											
GNSS		•							•	•	
I/Os		7	2	8	2	2	2	2	7	7	2
RS232		•			•				•	•	
RS485		•					•		•	•	
Bluetooth											
USB			Client	Client	Client		Client	Power/ Data			Client
Integrated bracket											
Grounding terminal											
RMS support			•	•	•	•		•	•	•	•
RutOS		•	•	•	•	•		•		•	•
M-Bus						•					

PRODUCT KEY FEATURES		TRM200	TRM240	TRM250	TRM500		TAP100	TAP200	DAP140	DAP142
5G					•					
4G/LTE		Cat4	Cat 1	M1/NB	Cat 19					
2G/3G		3G/2G	3G/2G	2G	3G					
CPU (MHz)							580	2×880	580	580
RAM (MB)							64	256	128	128
Flash memory (MB)							16	16	16	16
Active PoE-out										
Active PoE-in							•	•		
Passive PoE-in						S			•	•
Power voltage (VDC)		5	5	5	9-30	PNIO	44-57	44-57	9-30	9-30
SIM card slots	ODEMS	1	1	1	1	РОІ				
Ethernet ports	10 D					SS	1	1	2	2
Ethernet speed (Mbps)	Σ					ACCE	100	1000	100	100
Wi-Fi standard						⋖	n	ac	n	n
GNSS										
I/Os										
RS232										•
RS485										
Bluetooth										
USB		Power/ Data	Power/ Data	Power/ Data	Power/ Data					
Integrated bracket							•	•	•	•
Grounding terminal									•	•
RMS support							•	•	•	•
RutOS							•	•	•	•
M-Bus										

PRODUCT KEY Features	TSW010	TSW030	TSW040	TSW100	TSW101	TSW110	TSW114	TSW200	TSW202	TSW210	TSW212	TSW304	TSF010
Managed									•		•		
MRP									•		•		
STP/RSTP									•		•		
Profinet									•		•		
EtherNet/IP	A E S								•		•		
QoS	□ □ □ □ □ □ □ □ □ □ □ □ □ □ □ □ □ □ □								•		•		
Passive PoE-in	» «					•	•					•	
Active PoE-out	N E E		802.3 af/at	802.3 af/at	802.3 af/at			802.3 af/at	802.3 af/at				
Power voltage (VDC)	9-30	7-57	7-57	7-57	9-30	9-30	9-30	7-57	7-57	7-57	7-57	7-57	7-57
Ethernet ports	5	8	8	5	5	5	5	8	8	8	8	4	5
SFP ports								2	2	2	2		
Ethernet speed (Mbps)	100	100	100	1000	1000	1000	1000	1000	1000	1000	1000	1000	100
Integrated bracket	•	•	•				•	•	•	•	•	•	•
Grounding terminal		•	•	•	•	•	•	•	•	•	•	•	•
RMS support									•		•		
TswOS									•		•		

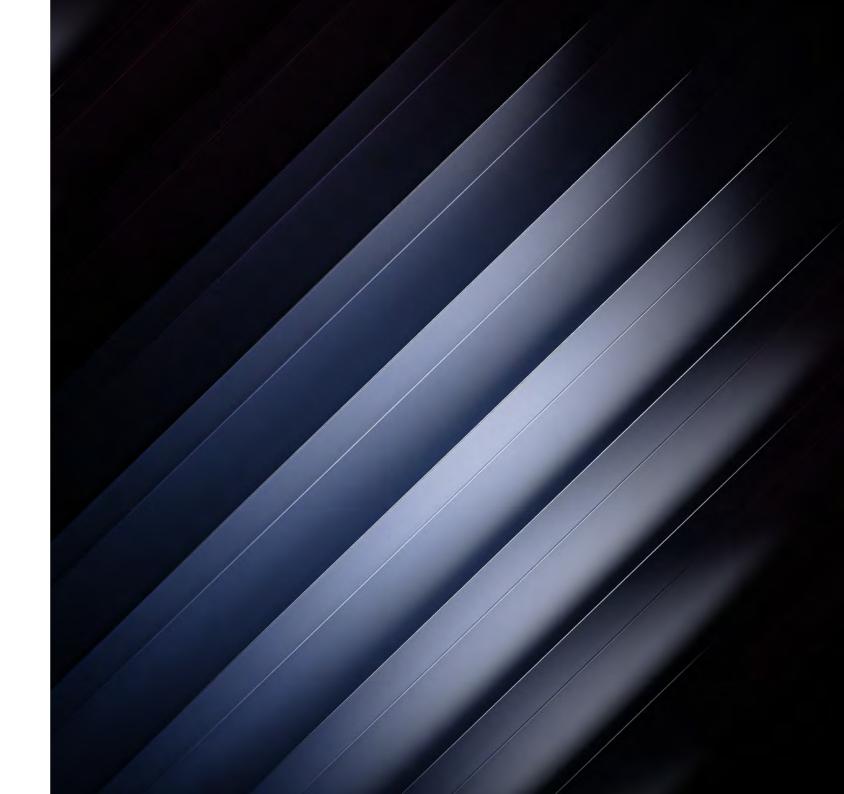



Distributor of Teltonika Networks devices

eshop.sectron.cz